

Applications

Construction

Pavement repair

Main features

Top access panel—for easier bit service and maintenance.

Side cutting bits—to decrease drum binding in the cut and to produce a vertical edge for improving the joint bond between a new layer of asphalt and the existing layer.

Hydraulic side-shift—for planing close to walls and curbs, and to easily reposition the drum for another pass.

Oscillating planer housing—for planing sloping surfaces or to match two uneven surfaces.

Rear frame wheels—to provide support and reduce tire bounce while planing.

Direct-drive high torque motors—for low maintenance and high efficiency.

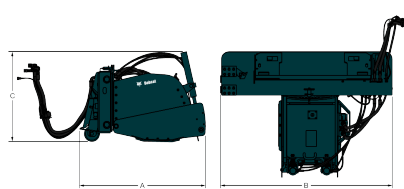
Bob-Tach™ mounting system with quick-connect controls—for fast, easy attachment changes.

Compatibility

Description	Item number	Compatible with loader
Planer 14in, Standard Flow	7188704	S130-E, S150-E, S160-E, T190-E, T320-B, S630-E, S185-E, S175-E, T190-B, S250-B, S650-E, T650-E, S205-E, S770-E, T770-E, A770-E, S510-E, S530-E, S550-E, S550-B, S570-E, S590-E, T590-E
Planer 16in, Surface	6905792	S160-E, T190-E, T320-B, S185-E, S175-E, T190-B, S250-B, S630-E, S650-E, T650-E, S205-E, S530-E, S550-E, S550-B, S570-E, S590-E, T590-E
Planer 18in, High Flow	7188703	S160-E, T190-E, T320-B, S185-E, S175-E, T190-B, S250-B, S630-E, S650-E, T650-E, S205-E, S530-E, S550-E, S550-B, S570-E, S590-E, T590-E
Planer 24in, High Flow	7184349	T190-E, T320-B, S185-E, S175-E, S175-E, T190-B, S250-B, S630-E, S650-E, T650-E, S205-E, S530-E, S530-E, S550-E, S550-E, S550-B, S550-B, S570-E, S570-E, S590-E, S590-E, T590-E, T590-E
Planer 40in, High Flow	6726632	S850-E, S630-E, S650-E, T650-E, S770-E, A770-E, T770-E, T870-E

Characteristics and performance

Description	Item number	Maximum cutting width (mm)	Cutting depth (with std drum) (mm)	Max. cutting angle ± (°)	Side shift (mm)	Planing distance next to curb (mm)
Planer 40in, High Flow	6726632	1016.0	130.0	8.0	650.0	65.0

Weights and dimensions


Description	Item number	Operating weight (kg)	Shipping weight (kg)	Overall length (A) (mm)	Overall width (B) (mm)	Overall height (C) (mm)
Planer 40in, High Flow	6726632	1043.0	1087.0	1118.0	1727.0	813.0